



DL-LD 系列警示灯面板




- 警示灯集成度高
- 警示灯数量、颜色、图案可定制
- 面板嵌入式安装
- 支持 CAN 通信
- 板前防护等级 IP67
- CE





1.技术参数（警示灯面板）


	DL-LD14G	DL-LD21G	DL-LD24G	DL-LD30G
示例				
电气性能				
工作电压[V]	9-36V DC			
电流损耗[ma]	<350mA(24 V DC, 25 ° C)			
反相保护	有			
短路保护	有			
结构数据				
尺寸[mm]	184.7*69.6 *27.15	166*81*25	154*69*25	207.1*81*25
重量(含支架)[g]	472	533	540	602
安装开口尺寸[mm]	175*60	158*73	146*61	199.1*73
面板材料	PVC 膜+亚克力、钢化玻璃可选	PVC 膜+亚克力	钢化玻璃	钢化玻璃
外壳材料	铝合金			
不锈钢安装支架	自带			
输出				
输出信号	CAN			
协议	CAN2.0B			
波特率	波特率:125kBit/s, 250kBit/s, 500kBit/s, 1000kBit/s（可设置）			
节点 ID	1-127(可设置)			
电气接口				
电气接口				
工作条件				
工作温度	-30℃～75℃			
存储温度	-40℃～85℃			
防护等级	IP67 正面 IP65 背面			
EMC 电磁兼容	EN55032:2015			
	EN61000-3-2:2014			
	EN61000-3-3:2013+A1: 2019			
	EN55035:2017			
抗冲击	GB/T28046.3 500m/s2 加速度, 脉冲时间 11ms,半正弦波			
抗震	GB/T2423.10 5g 正弦振动严酷等级 5M3			
盐雾试验	GB/T 2423.18 严酷等级 3			






2.外形尺寸


DL-LD14G:

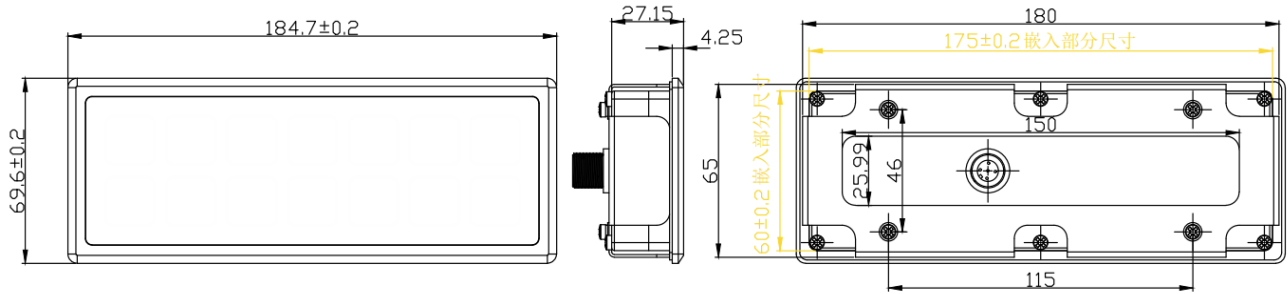


DL-LD21G:

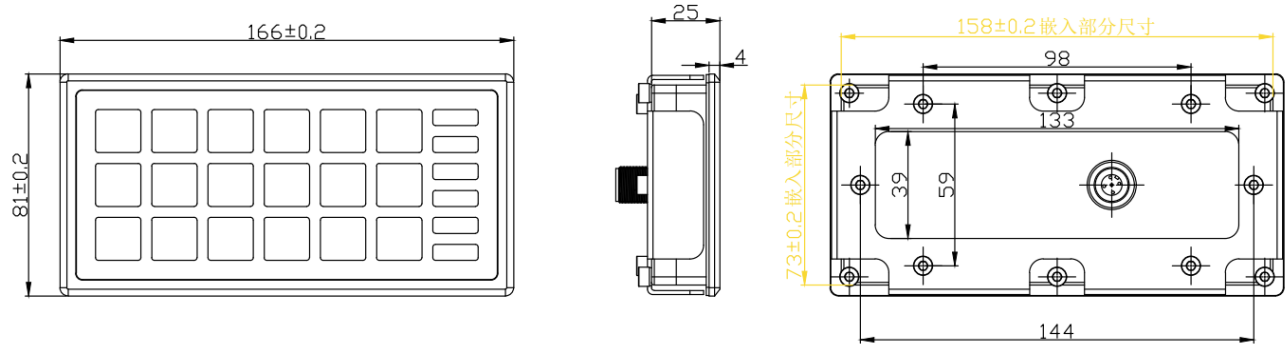

DL-LD24G:

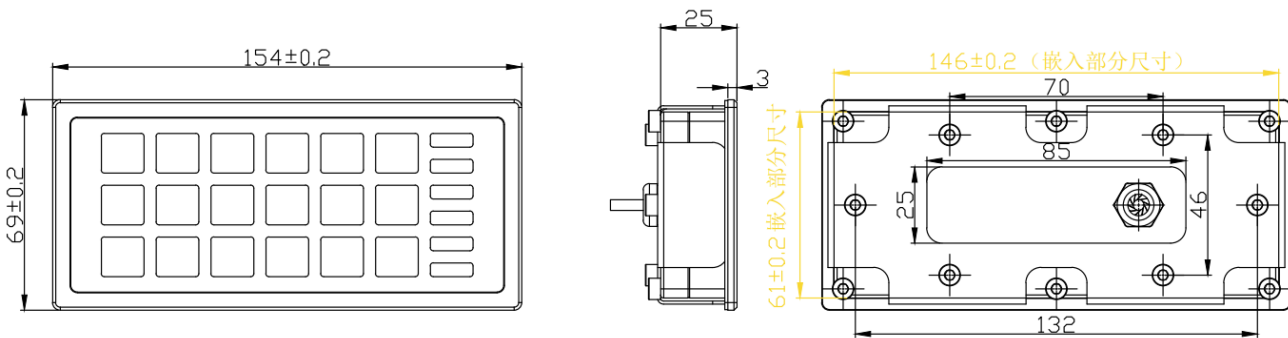

DL-LD30G:

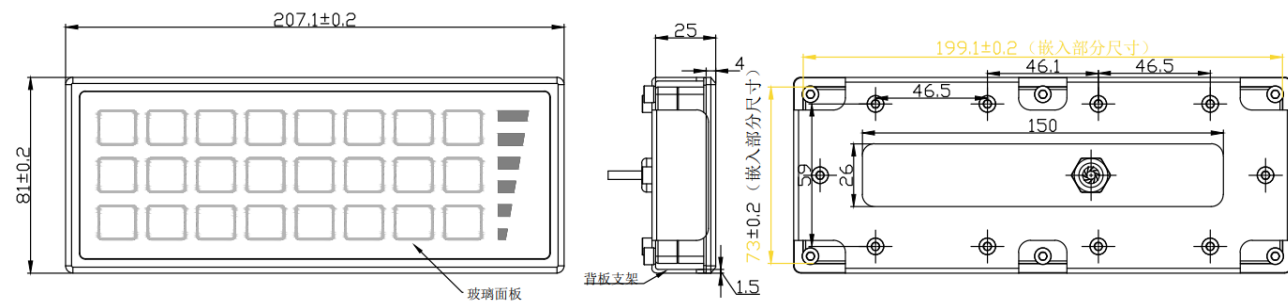

3.选型参考

